IF IN DOUBT ASK
DO NOT SCALE

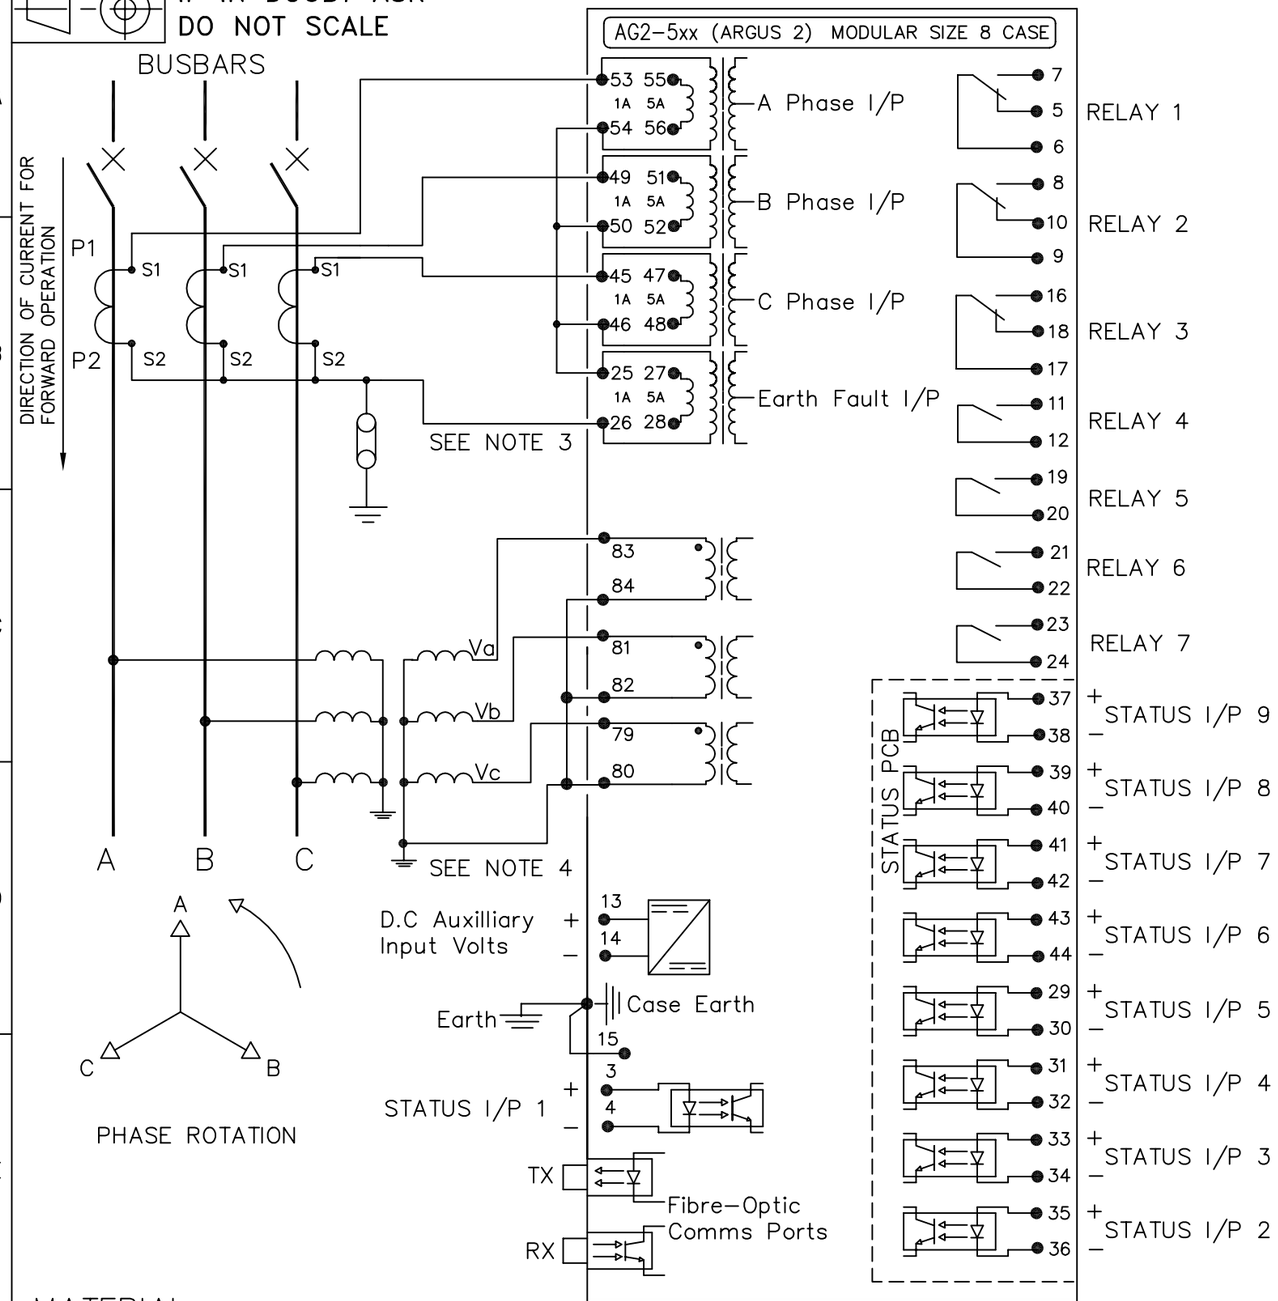

TERMINAL BLOCKS VIEWED FROM REAR

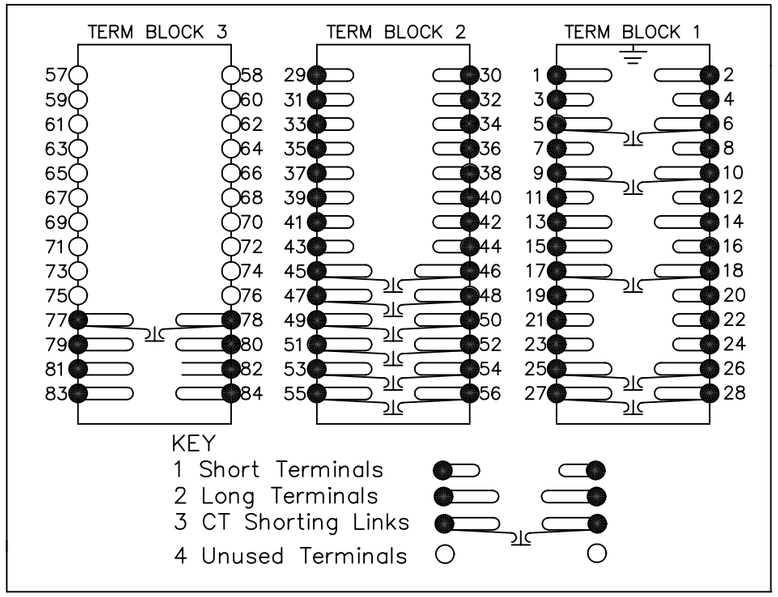

NOT SUBJECT TO UPDATE ONCE COPIED / PRINTED OR DOWNLOADED

NOTES

1 CT CIRCUITS ARE SHOWN CONNECTED TO RELAY 1 AMP TAP.USE ALTERNATIVE TAP FOR 5AMP RATED CTs.
2 CT & EARTH CONNECTIONS ARE TYPICAL ONLY.
3 APPLICATION SHOWS USE OF HOLMGREEN CONNECTION FOR E/F CIRCUIT.USE OF SEPERATE RING CORE CT IS ALSO POSSIBLE.
4 APPLICATION SHOWS USE OF 5-LIMB STAR CONNECTED VT WITH NEUTRAL VOLTAGE DERIVED INTERNALLY.
5 FOR TERMINAL DIAGRAM SEE 2434W50006 (A2)
6 DRG SHOWS (7 OUTPUTS, 9 INPUTS)

ISSUE	DATE	CHANGE NOTED
1	11/12/02	△

Copyright © 2002 VATECH REYROLLE ACP Ltd. Hebburn

MATERIAL:

Dimensions in millimetres : Surface texture in micrometres.
Machine where marked ✓
For explanation of dimensions, tolerances, notes etc. see B.S.308.
Limit on untoleranced unmachined dimensions ± _____
Limits on untoleranced machined dimensions to B.S.4500;
i.e. up to 6±0.1; over 30 to 120±0.3; over 315±0.8;
over 6 to 30±0.2; over 120 to 315±0.5;
General unmachined angular tolerance ± _____

Finish:

Treatment:

Title: ARGUS 2 DIGITAL DIRECTIONAL RELAY
TYPICAL SCHEME DIAGRAM FOR
3P DIRECTIONAL P/F & 1P DIRECTIONAL E/F RELAY
WITH STAR CONNECTED VT

VATECH REYROLLE
AUTOMATION, CONTROL & PROTECTION

Original Scale. NTS

First used on:
Similar Articles: 2434W10089
Supersedes:

Drg. No. 2434W10089

DRAWN	CHECKED	APPROVED	DATE	IE	OPS	PCP	Purch.Spec.	TQ	EAC	CE	STD	A3
M LEASK	M ELLIS	RD.WATSON	9/6/03									

SIEMENS
siemens-russia.com