

RK 93

Energetic diffuse reflection light scanner

Part No. 501 11605




0 ... 23mm







- Background suppression through V-shaped optical system
- Infrared light
- Mounting holes for fast installation
- Connection via M12 connector, standard plug or cable (2m)

Dimensioned drawing

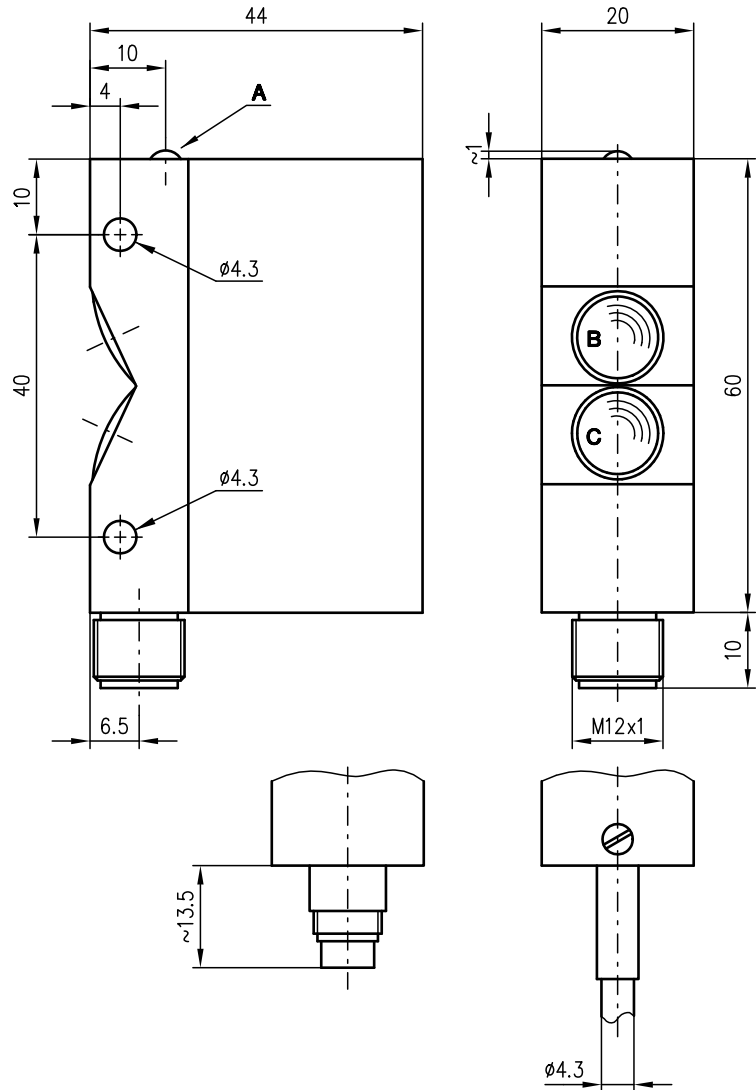

- A** Indicator diode
- B** Receiver
- C** Transmitter

Electrical connection

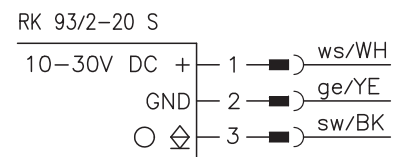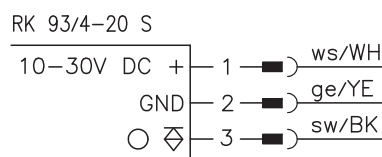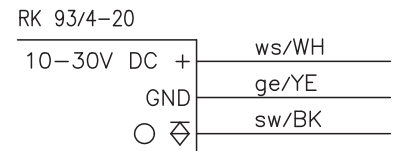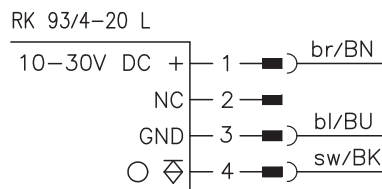

Accessories:

(available separately)

- M12 connectors (KD ...)
- Ready-made cables (KB ...)
- Standard plug

We reserve the right to make changes • 93_c01gb.fm

Specifications

Optical data

Typ. scanning range limit (white 90%) ¹⁾	0 ... 23mm
Scanning range ²⁾	see tables
Light source	LED (modulated light)
Wavelength	880nm (infrared)

Timing

Switching frequency	250Hz
Response time	2ms

Electrical data

Operating voltage U_B ³⁾	10 ... 30VDC (incl. residual ripple)
Residual ripple	≤ 15% of U_B
Power consumption	max. 0.6W
Switching output	PNP or NPN transistor output
Function characteristics	light switching
Signal voltage high/low	≥ ($U_B - 3V$) / ≤ 2V
Output current	max. 100mA

Indicators

LED yellow on	reflection
LED yellow flashing	reflection, no performance reserve

Mechanical data

Housing	metal
Optics cover	glass
Weight	170g
Connection type ⁴⁾	M12 connector 4-pin, standard plug 4-pin, or cable 2000mm

Environmental data

Ambient temp. (operation/storage)	-20°C ... +60°C / -30°C ... + 70°C
Safety class	III (acc. to EN 61140)
Protective circuit ⁵⁾	2, 3
Protection class	IP 65 (acc. to EN 60529)
LED class	1 (acc. to EN 60825-1)
Applied standards	EN 60947-5-2, UL 508

- 1) Typ. scanning range limit: max. attainable range without performance reserve
- 2) Scanning range: recommended range with performance reserve
- 3) Observe the safety regulations and installation instructions regarding power supply and wiring; for UL applications: only for use in "Class 2" circuits acc. to NEC
- 4) Cable cross-section 4x0.25mm²
- 5) 2=polarity reversal protection, 3=short-circuit protection for all outputs



Tables

1	0	20	23
2	2	18	20
3	4	15	17

1	white 90%
2	grey 18%
3	black 6%

<input type="checkbox"/>	Scanning range [mm]
<input type="checkbox"/>	Typ. scanning range limit [mm]

Diagrams



Order guide

	Designation	Part No.
With M12 connector		
PNP transistor output	RK 93/4-20 L	500 23930
With standard plug		
NPN transistor output	RK 93/2-20 S	500 00544
PNP transistor output	RK 93/4-20 S	500 00551
With cable connection 2m		
PNP transistor output	RK 93/4-20	500 00550

Remarks

Approved purpose:

The diffuse reflection light scanners are optical electronic sensors for optical, contactless detection of objects.