

KFX-ETA-320

Art.-Nr. 50117758

Lichtleiter, tastend

KFX-ETA-320

Part No. 50117758

fiber, reflective

Technische Daten

Lichtleiter Typ	höchste Präzision
Betriebstemperatur	-55°C ... +70°C
Min. Biegeradius	R10
Außendurchmesser Lichtleiter	2x Ø1,25mm
Aktiver Durchmesser Faser	2x Ø0,25mm
Kleinste erkennbares Teil	Ø0,05mm
Gesamtlänge	2019mm

Specifications

Fiber type	high precision
Operating temperature	-55°C ... +70°C
Min. bending radius	R10
Fiber jacket diameter	2x Ø1.25mm
Active fiber diameter	2x Ø0.25mm
Smallest detectable object	Ø0.05mm
Total length	2019mm


Features



Typische Grenzreichweite für helle Objekte (weiß 90%) Typ. scanning range limit for light objects (white 90%)

LV 463	14mm
LV 462	8mm
LV 461	5mm

Maßzeichnung/Dimensioned drawing

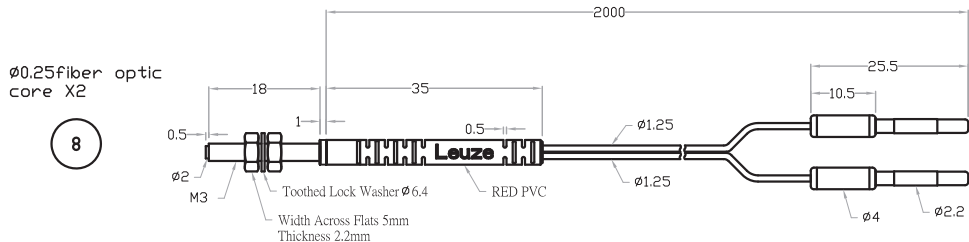

Zubehör (separat erhältlich)/Accessories (available separately)

- KL-M03; 50117780
- KL-M03-1; 50117783